(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 4 August 2005 (04.08.2005)

(10) International Publication Number WO 2005/071922 A1

(51) International Patent Classification7: 12/56, 12/28

H04L 29/06,

(21) International Application Number:

PCT/IB2005/050167

(22) International Filing Date: 14 January 2005 (14.01.2005)

(25) Filing Language:

(26) Publication Language:

English

(30) Priority Data: 04100230.4

23 January 2004 (23.01.2004) EP

- (71) Applicant (for DE only): PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH [DE/DE]; Steindamm 94, 20099 Hamburg (DE).
- (71) Applicant (for all designated States except DE, US): KONINKLIJKE PHILIPS ELECTRONICS N. V.


[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

- (75) Inventors/Applicants (for US only): SCHREYER, Oliver [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE). BUDDE, Wolfgang [DF/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE). ERDMANN, Bozena [PL/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).
- (74) Agents: VOLMER, Georg et al.; Philips Intellectual Property & Standards Gmb11, Weisshausstr. 2, 52066 Aachen (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,

[Continued on next page]

(54) Title: METHOD FOR AUTHENTICATION OF EXTERNAL APPARATUSES IN HOME OR WIRELESS NETWORKS

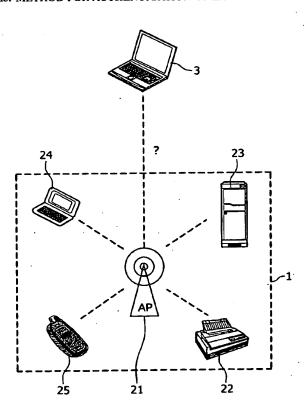

(57) Abstract: The invention relates to a method of authentication, particularly in home networks (1), between a network-internal apparatus (23) and a wireless network-external apparatus (3). The authentication is based on a comparison of the values of both apparatuses, which values result from their separate measurements of at least one predefined ambient parameter. Alternatively, the authentication is realized by encrypting configuration data on the basis of values of measured, predefined ambient parameters.

KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.